


# iSDMS-602

## SDM Signage Player

7th Generation Intel® Core™ U-series Processors Smart Display Module with Intel® UHD graphics 620

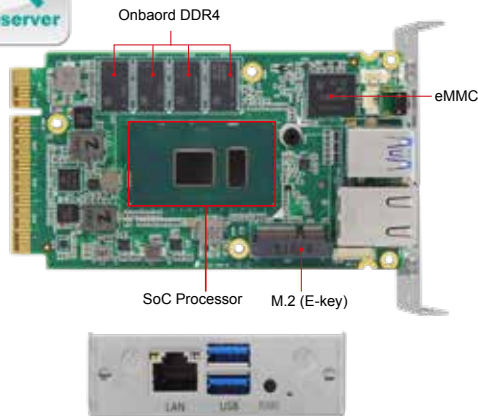

## Features

- Intel® Smart Display Module (small size)
- 7th Generation Intel® Core™ U-series Processors
- Onboard DDR4 up to 8GB
- Onboard eMMC up to 128G
- 1x M.2 2230 (E-Key)
- 1x USB 3.0 x 2; LAN I211, RJ45
- 1x HDMI 1.4, 1x DP1.2 (via edge connector)

## Specifications

System Mainboard	Intel® SDM-S Module
CPU	7th Gen Intel® Core™ i7-7600U/ i5-7300U/ i3-7100U/ Celeron® 3965U Processors
CPU Socket	FCBGA 1170
Chipset	Integrated in Intel® Processors
Memory	Onboard DDR4 up to 8G
Graphics	Intel® HD graphics 620
LAN	1x Intel® I211 RJ45
Expansion Slots	1x M.2 2230 (E-Key)
I/O Interface	1x RJ45 LAN 2x USB 3.0 1x Power switch
Auto Control and Monitoring	Watchdog Timer: 256 segments, 0, 1, 2...255 (sec/min)
Power Requirement	12V DC from the Docking Board via edge connector
Construction	SGCC
Weight	TBD
Chassis Color	N/A
Storage	eMMC
Mounting	SDM standard bracket
Dimensions	80mm(W) x 112mm(D) x 25mm(H) 3.14"(W) x 4.4"(D) x 0.98"(H)
Operating Temperature	0°C ~ 55°C
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Relative Humidity	10% ~ 90% (non-condensing)
Vibration	mSATA: 5 grms / 5 ~ 500Hz / random operation
Certification	CE, FCC class B, CCC
Operating System	Win10 64-bit Enterprise

## Ordering Information

iSDMS-602	SDM module with Intel® Core™ i5-7300U 3.50 GHz, onboard DDR4 4G, onboard eMMC 64G
-----------	---

## Dimensions

