


iSDML-602

SDM Signage Player

8th Generation Intel® Core™ S-series Processors Smart Display Module with Intel® UHD graphics 630

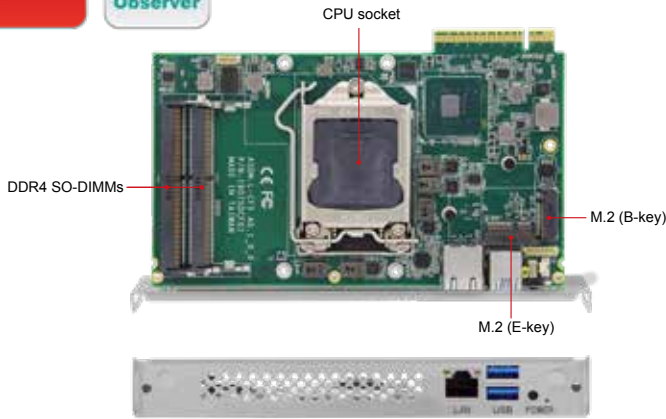

Features

- Intel® Smart Display Module (large size)
- 8th Generation Intel® Core™ S-series Processors (socket type)
- 2x DDR4 2666 SO-DIMM
- 1x M.2 (B-key), 1x M.2 2230 (E-Key)
- 1x M.2 2230 (E-Key)
- 2x USB 3.0; LAN I219, 1x RJ45
- 1x HDMI 2.0, 1x DP1.2 (via edge connector)

Specifications

System Mainboard	Intel® SDM-L Module
CPU	8th Gen Intel® Core™ S-series Processors
CPU Socket	FCLGA1151
Chipset	Intel® Chipsets H310/ Q370
Memory	DDR4-2666 SO-DIMM, up to 65G
Graphics	Intel® UHD graphics 630
LAN	1x Intel® I219LM, RJ45 Gigabit LAN
Expansion Slots	1x M.2 2230 (E-Key)
I/O Interface	1x RJ45 Gigabit LAN 2x USB 3.0 1x Power switch
Auto Control and Monitoring	Watchdog Timer: 256 segments, 0, 1, 2...255 (sec/min)
Power Requirement	12V DC from the docking board via edge connector
Construction	SGCC
Weight	TBD
Chassis Color	N/A
Storage	1x M.2, B key (2242)
Mounting	SDM standard bracket
Dimensions	195mm(W) x 112mm(D) x 25mm(H) 7.67"(W) x 4.4"(D) x 0.98"(H)
Operating Temperature	0°C ~ 55°C
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Relative Humidity	0% ~ 90% relative humidity, non-condensing
Vibration	mSATA: 5 grms / 5 ~ 500Hz / random operation
Certification	CE, FCC class B, CCC
Operating System	Win10 64-bit Enterprise

Ordering Information

iSDML-602	SDM module with Intel® Core™ i7-8700T 4.0 GHz, 1x 4G DDR4-2666 SO-DIMM, M.2 (B-key) 128G storage
-----------	---

Dimensions

